


## Adjustable Aluminum Door Frames

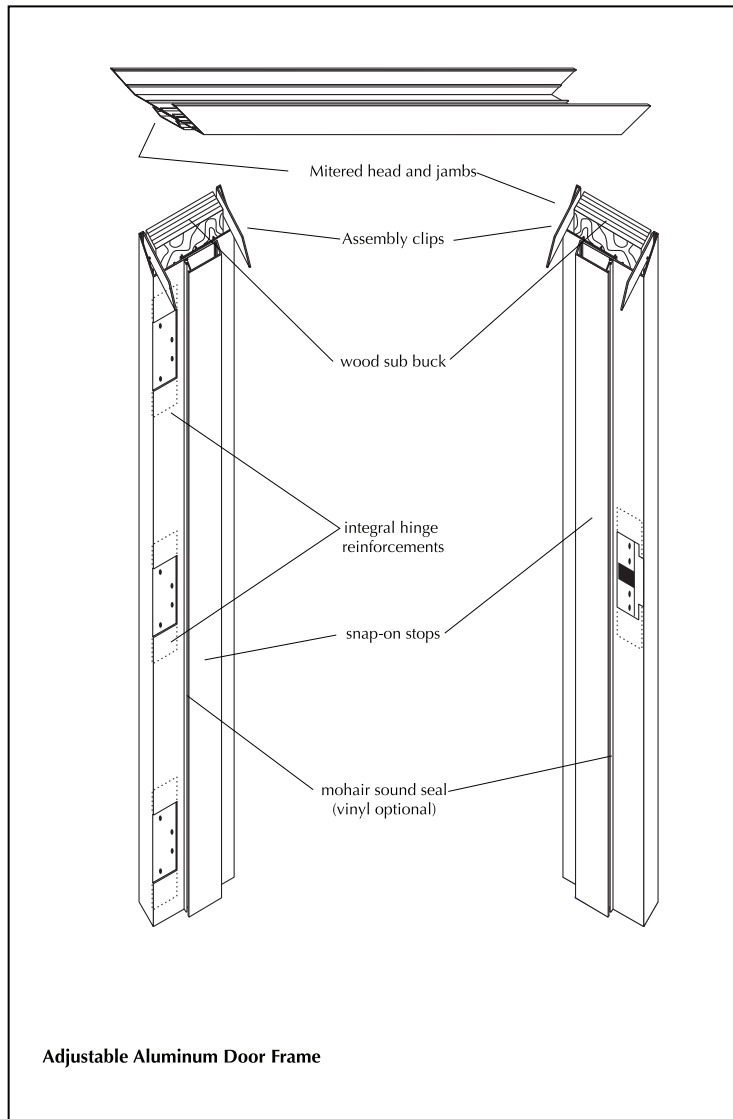

By specifying Versatrac adjustable aluminum door frames, you accommodate nonstandard wall thickness and match the appearance of other Versatrac components. \*The frames are available for wall thicknesses from 3 5/8" to 7 1/4".


The frame includes integral aluminum reinforcements to provide additional structural support for the installation of hinges and strike plates.

For strength, good looks and versatility, specify Versatrac adjustable aluminum door frames.

Adjustable glazing components are not available.

## Adjustable Aluminum Door Frames

**90-Minute Label—Fits Walls 3 5/8" to 7 1/4"  
Maximum Door Opening Size 6'0" x 9'0"**

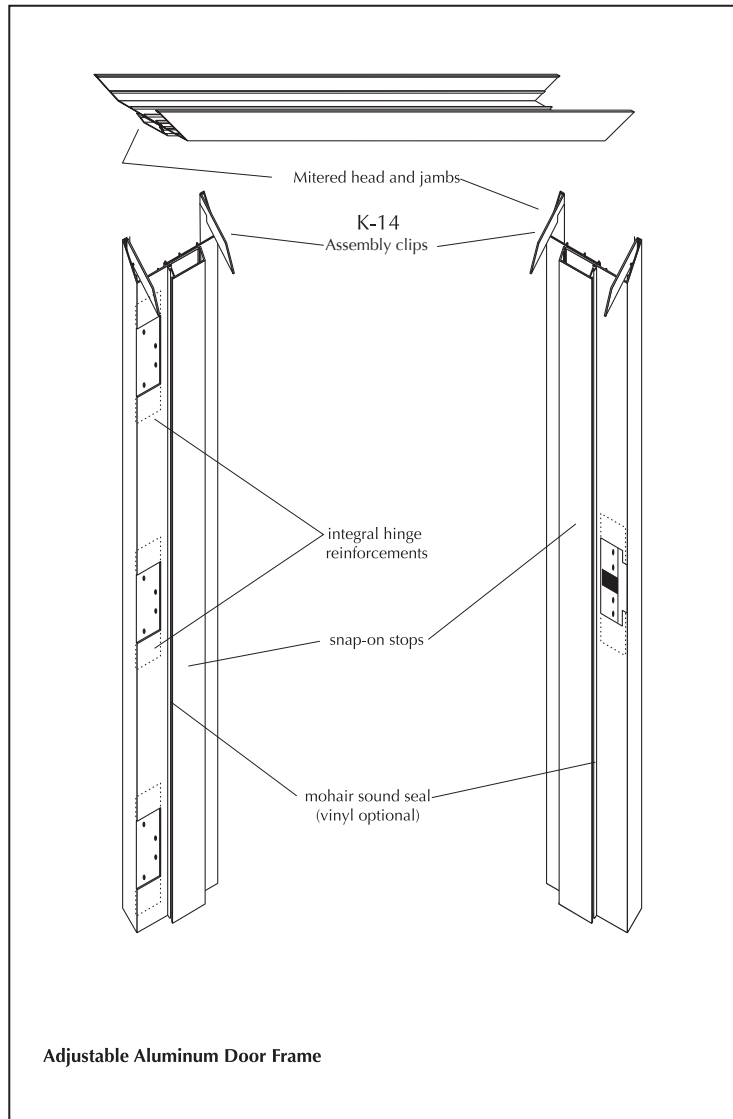

By specifying Versatrac adjustable aluminum door frames, you accommodate nonstandard wall thickness and match the appearance of other Versatrac components.

The frame includes integral aluminum reinforcements to provide additional structural support for the installation of hinges and strike plates.

For strength, good looks and versatility, specify Versatrac adjustable aluminum door frames.

Adjustable glazing components are not available.

Test No. WHI-495-1390