


Hardware

Two-Knuckle Hinges

These two-knuckle hinges are of full mortise design and standard weight, 4 1/2" x 4" template.

- Hinges are supplied in finishes that match Versatrac components: bronze, black and white. Plated finishes available on special order.
- Neat, clean barrel design.
- Only three hinges required for solid core doors up to 3'0" x 9'0". Nylon washer takes vertical load and large diameter pin supports the lateral load.
- Door cannot be lifted off when in closed position.
- D3 Bronze, D4 Black, US26D Brushed Chrome.

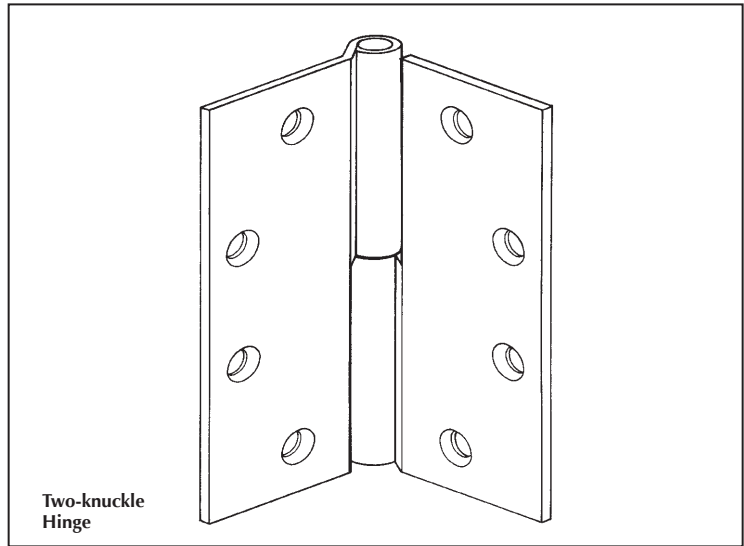

Two-knuckle Hinge

Slimline Closers with Optional Covers

- Surface mounted and non-handed; can be installed in standard manner or can be top jamb mounted.
- Parallel over with optional P.A. bracket.
- Two noncritical adjustment valves to control sweep and latching speeds.
- Tested by Underwriters Laboratories, Inc. to meet ANSI A-156.4 Grade 1 standards.

